


**BOROUGH OF ALLENTOWN  
COUNTY OF MONMOUTH  
STATE OF NEW JERSEY**



**ORDINANCE NO. 06-2024**

**AN ORDINANCE AMENDING CHAPTER 30: "LAND SUBDIVISION" OF THE BOROUGH'S REVISED GENERAL ORDINANCES TO AMEND SECTION 30-13: "STORMWATER MANAGEMENT" WITH THE FINAL REVISIONS THERETO AS RECOMMENDED BY THE MONMOUTH CONUTY PLANNING BOARD.**

**WHEREAS**, the New Jersey Department of Environmental Protection ("NJDEP") recently amended its state-wide Stormwater Management Rules, N.J.A.C. 7:8, *et seq.*; and

**WHEREAS**, the Borough of Allentown (the "Borough") presently maintains its municipal stormwater management regulations at Borough Code Section 30-13, and recently adopted Borough Ordinances Nos. 16-2023 and 03-2024 to update same; and

**WHEREAS**, in compliance with the final review and recommendations of the Monmouth County Planning Board, the Borough now amends its stormwater management regulations herein;

**NOW, THEREFORE, BE IT ORDAINED** by the Mayor and Council of the Borough of Allentown, County of Monmouth, State of New Jersey, that Section 30-13: "Stormwater Management" of Chapter 30: "Land Subdivision" of the Borough's Revised General Ordinances is amended as follows (~~stricken text~~ indicates deletions, underlined text indicates additions):

**CHAPTER 30: "LAND SUBDIVISION"**

\* \* \*

**§ 30-13 STORMWATER MANAGEMENT.**

\* \* \*

**§ 30-13.8 Safety Standards for Stormwater Management Basins.**

- A. This section sets forth requirements to protect public safety through the proper design and operation of stormwater management BMPs. This section applies to any new stormwater management BMP.
- B. The provisions of this section are not intended to preempt more stringent municipal or county safety requirements for new or existing stormwater management BMPs. Municipal and county stormwater management plans and ordinances may, pursuant to their authority, require existing stormwater management BMPs to be retrofitted to meet one or more of the safety standards in Section 30-13.8.C.1, 30-13.8.C.2, and 30-13.8.C.3 for trash racks, overflow grates, and escape provisions at outlet structures.

C. Requirements for Trash Racks, Overflow Grates and Escape Provisions

1. A trash rack is a device designed to catch trash and debris and prevent the clogging of outlet structures. Trash racks shall be installed at the intake to the outlet from the Stormwater management BMP to ensure proper functioning of the BMP outlets in accordance with the following:
  - a. The trash rack shall have parallel bars, with no greater than six-inch spacing between the bars;
  - b. The trash rack shall be designed so as not to adversely affect the hydraulic performance of the outlet pipe or structure;
  - c. The average velocity of flow through a clean trash rack is not to exceed 2.5 feet per second under the full range of stage and discharge. Velocity is to be computed on the basis of the net area of opening through the rack; and
  - d. The trash rack shall be constructed of rigid, durable, and corrosion resistant material and designed to withstand a perpendicular live loading of 300 pounds per square foot.
2. An overflow grate is designed to prevent obstruction of the overflow structure. If an outlet structure has an overflow grate, such grate shall meet the following requirements:
  - a. The overflow grate shall be secured to the outlet structure but removable for emergencies and maintenance.
  - b. The overflow grate spacing shall be no ~~less~~-greater than two inches.
  - c. The overflow grate shall be constructed and installed to be rigid, durable, and corrosion resistant, and shall be designed to withstand a perpendicular live loading of 300 pounds per square foot.
3. Stormwater management BMPs shall include escape provisions as follows:
  - a. If a stormwater management BMP has an outlet structure, escape provisions shall be incorporated in or on the structure. Escape provisions include the installation of permanent ladders, steps, rungs, or other features that provide easily accessible means of egress from stormwater management BMPs. With the prior approval of the municipality pursuant to 30-13.8.C, a free-standing outlet structure may be exempted from this requirement;
  - b. Safety ledges shall be constructed on the slopes of all new stormwater management BMPs having a permanent pool of water deeper than two and one-half feet. Safety ledges shall be comprised of two steps. Each step shall be four to six feet in width. One step shall be located approximately two and one-half feet below the permanent


water surface, and the second step shall be located one to one and one-half feet above the permanent water surface. See 30-13.8.E for an illustration of safety ledges in a stormwater management BMP; and

- c. In new stormwater management BMPs, the maximum interior slope for an earthen dam, embankment, or berm shall not be steeper than three horizontal to one vertical.

D. Variance or Exemption from Safety Standard

A variance or exemption from the safety standards for stormwater management BMPs may be granted only upon a written finding by the municipality that the variance or exemption will not constitute a threat to public safety.

E. Safety Ledge Illustration

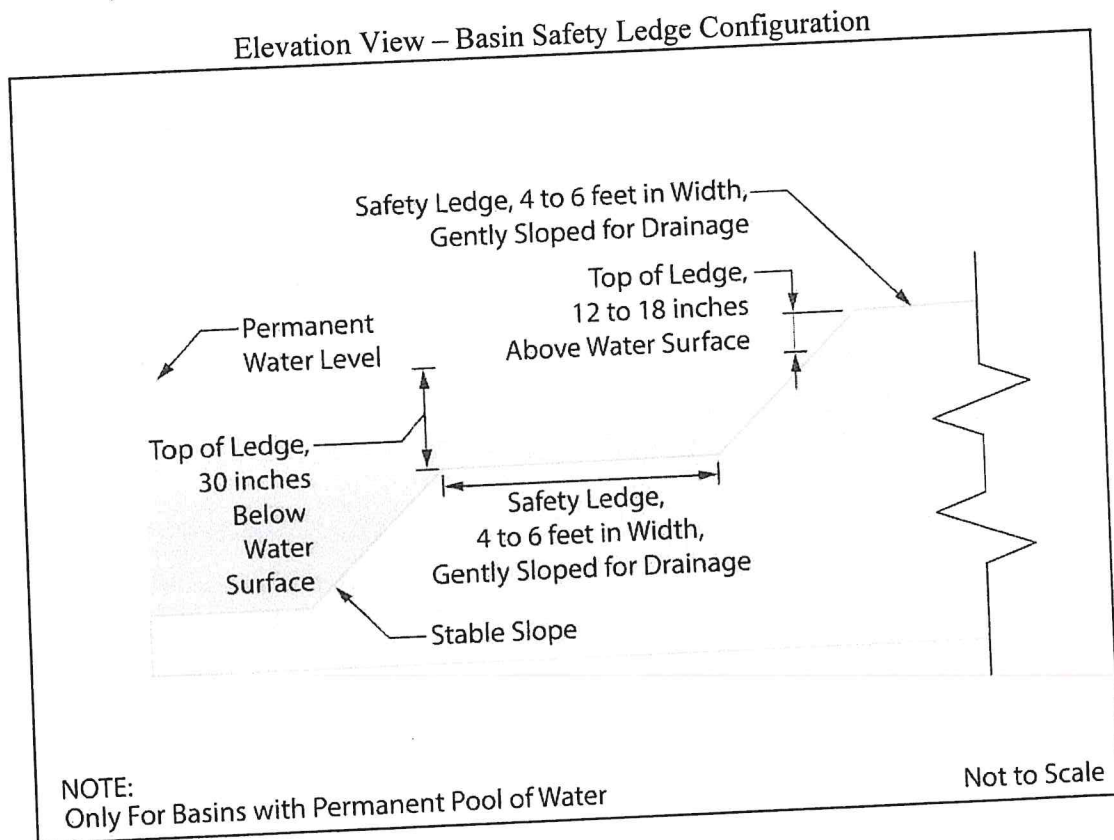

**BE IT FURTHER ORDAINED** that should any section, paragraph, sentence, clause, or phase of this ordinance be declared unconstitutional or invalid for any reason, the remaining portion of this ordinance shall not be affected thereby and shall remain in full force and effect, and to that end the provisions of this ordinance are hereby declared to be severable; and

**BE IT FURTHER ORDAINED** that, after introduction, the Borough Clerk is hereby directed to submit a copy of the within Ordinance to the Planning/Zoning Board of the Borough of Allentown for its review in accordance with N.J.S.A. 40:55D-26 and N.J.S.A. 40:55D-64. The Planning Board is directed to make and transmit to the Borough's Mayor & Council, within 35 days after referral, a report including identification of any provisions in the proposed ordinance which are inconsistent with the master plan and recommendations concerning any inconsistencies and any other matter as the Board deems appropriate; and

**BE IT FURTHER ORDAINED** that, after adoption of this Ordinance, the Borough Clerk is hereby directed to submit a copy of the within Ordinance to the Planning Board of the County of Monmouth for its review and approval in accordance with N.J.S.A. 40:55D-97.


**BE IT FURTHER ORDAINED** that this Ordinance shall take effect upon its (1) adoption; (2) publication in accordance with the laws of the State of New Jersey; and (3) approval by the Monmouth County Planning Board pursuant to N.J.S.A. 40:55D-97.

**BE IT FURTHER ORDAINED** that all ordinances or parts of ordinances inconsistent with this amending ordinance are hereby repealed to the extent of their inconsistencies only.



\_\_\_\_\_  
THOMAS FRITTS, Mayor

ATTEST:

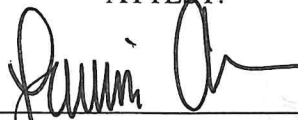

\_\_\_\_\_  
LAURIE A. ROTH, MAS, RMC, CMR, CPM  
Municipal Clerk

DATED: June 11, 2024

DATED: June 11, 2024